


## BG600FJ-S

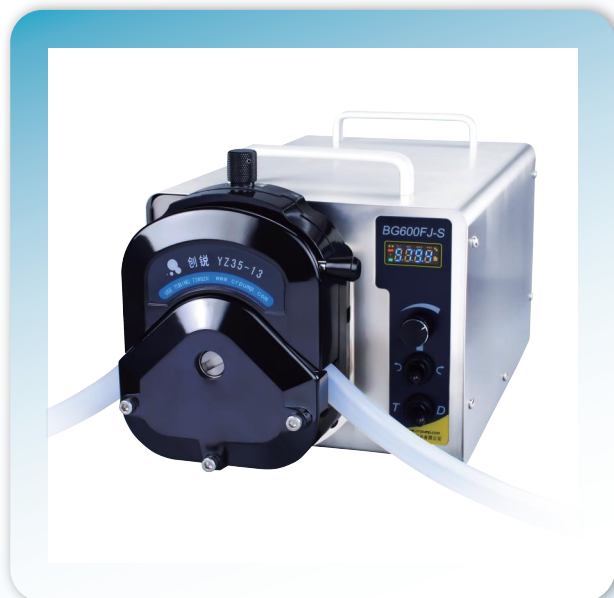

It is used in industrial fermentation, fluid transportation such as superplasticizers and admixtures, and is suitable for large-flow sub-packaging environments.


- By adjusting the key position, the two modes of transmission or distribution can be switched.
- Driven by servo motor, powerful power and more accurate control.
- It can automatically save the control parameters when the last power failure.
- After setting the target flow, input the actual flow value, and the system will automatically perform flow correction.
- Support RS485/MODBUS communication protocol, the protocol can also be customized according to customer needs.
- YZ35, YZ35-13 and other pump heads can be installed, and multiple pump heads can be cascaded.

Max Flow : 12000mL/min

Max speed : 600rpm

### Pump head flow parameter table

**Note:** The test environment for flow data is normal temperature and pressure, and the test fluid is water. The values are for reference only, please refer to the actual situation.

Pump head	Model	Tube	ID (mm)	Wall thickness (mm)	Max flow (mL/min)	Max speed (rpm)
	YZ35	73#	9.6	3.3	7400	600
		82#	12.7	3.3	12000	
	YZ35-13	73#	9.6	3.3	7400	
		82#	12.7	3.3	12000	

\* For specific needs, please consult Chuangrui Company.

Flow unit:(mL/min) Tube:(mm)